


RUDERT EDELSTAHL-TECHNIK GmbH

Sachsenweg 3 / Gewerbegebiet • 08451 Crimmitschau
Tel.: 03762/9561-0 • Fax: 03762/956115
Internet: www.rudert-edelstahl.de • e-Mail: info@rudert-edelstahl.de

stainless steel – high capacity tank type: R-HLS

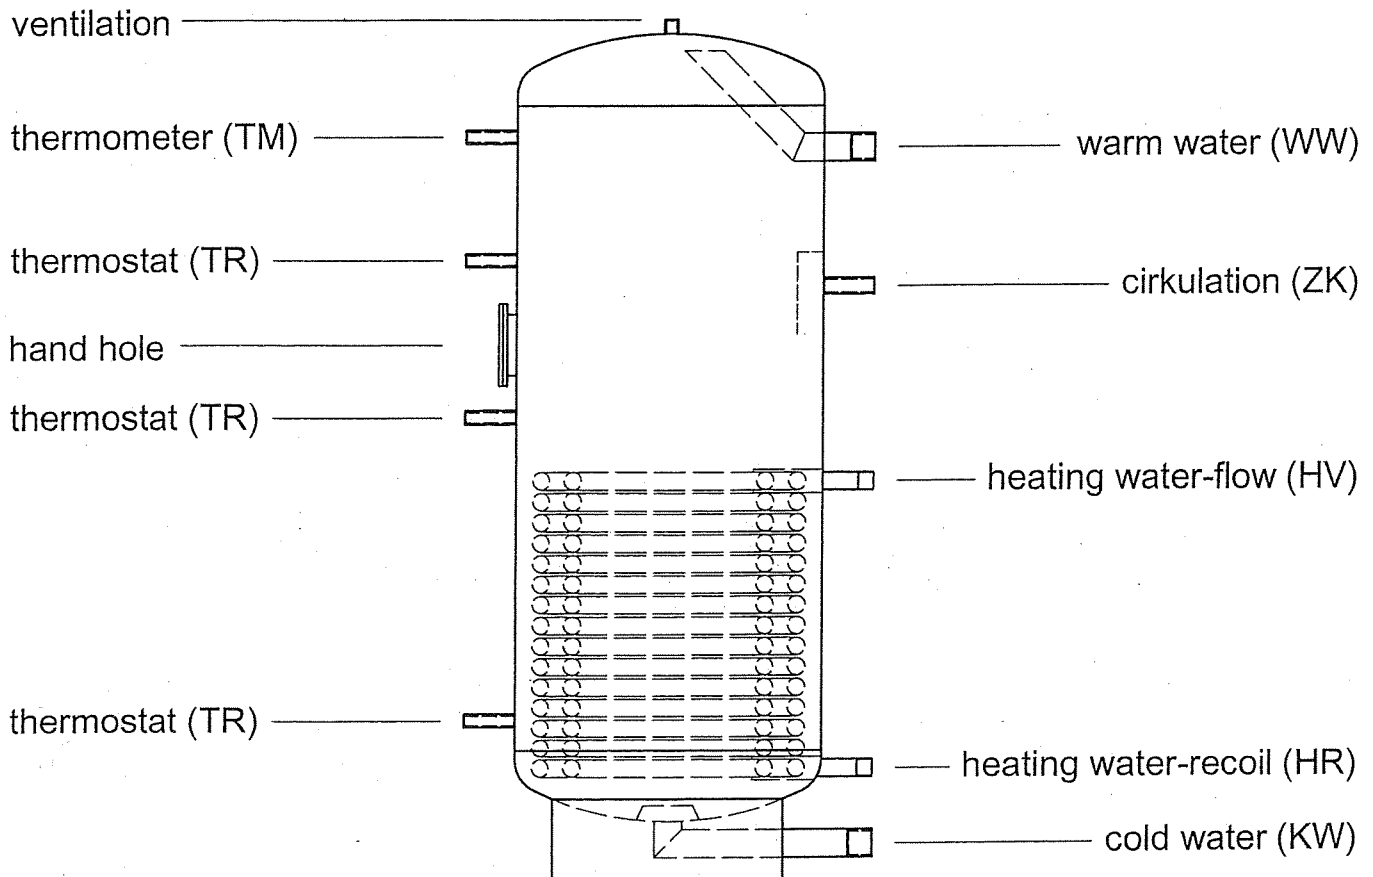

stainless steel – high capacity tank

type: R-HLS

- **max. working pressure: 10 bar/ exchanger-25 bar**
- **max. working temperature: 95°C/ exchanger-200°C**
- **material: 1.4571 (316 Ti)**
- **CE-identification and conformity explanation**
- **insulation: PU-hard-foam / soft-foam**
other colours of question
- **complete with a electric heat cartridge is possible over the hand hole DN 120**

type	capacity	heating surface	diameter	total height	weight	N-number
	litre	m ²	without isolation mm	inclusive isolation mm	kg	DIN 4708 60°C
R-HLS 160	160	1,4	500	1130	52	14
R-HLS 200	200	1,8	500	1445	64	16
R-HLS 300	300	2,6	500	1695	80	20
R-HLS 400	400	3,8	600	1735	98	30
R-HLS 500	500	4,0	600	1985	115	34

N-number-calculate: heat-water:90°C/65°C
warm-water:10°C/60°C

- **special size of enquiry**