



for high temperatures
K-FLEX
SOLAR HT

K-FLEX SOLAR HT

T E C H N I C A L D A T A

Temperature range	+150°C
Thermal conductivity λ W/(m·K) EN ISO 8497 (DIN 52613) EN 12667 (DIN 52612)	+0 °C = 0.040
Corrosion Risk	EN 13468, pH neutral
Fire	Tube: E (EN 13501-1) Sheet: E (EN 13501-1)

L'ISOLANTE K-FLEX reserves the right to change data and technical requirements without notice.

K-FLEX SOLAR HT



K-FLEX SOLAR HT



Elastomeric Insulation for high temperatures

Applications:


Solar Panels
Low pressure steam or industrial processes up to 150 °C

K-FLEX SOLAR HT

The rational and convenient solution for solar panels and industrial processes up to 150 °C.

A new, revolutionary box, tailor-made for the client, offering practical and economical advantages for use and distribution.

Box dimensions:
395 x 580 x 580 mm

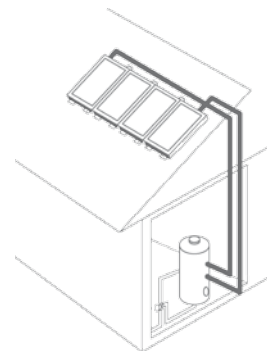

R A N G E

F I N I S H I N G

	THICKNESS:	DIAMETER:
Coils	13 - 19 mm	15 - 18 - 22 mm
	THICKNESS:	DIAMETER:
Tube 2 m	13 - 19 - 25 - 32 mm	from 10 to 89 mm
	THICKNESS:	
Sheet 1000 mm	10 - 13 - 19 - 25 - 32	



K-FLEX AL CLAD

K-FLEX ALU